

# GREEN

## RIBBON SPECIFICATION SHEET

# WAX


COLOUR

## THERMAL TRANSFER RIBBON

UN020GN is a Green premium wax ribbon, designed to work on a wide range of printers. It is suitable for printing on many different types of label stocks.

### RIBBON PROPERTIES

INK TYPE	WAX
RIBBON THICKNESS	10.0±0.3µm
BASE FILM	POLYESTER (4.5±0.3µm)
COLOUR	Green
PRINT SPEED	UP TO 10"/SEC
INK MELT POINT	77°C
PRINTING ENERGY	12mJ/mm <sup>2</sup>

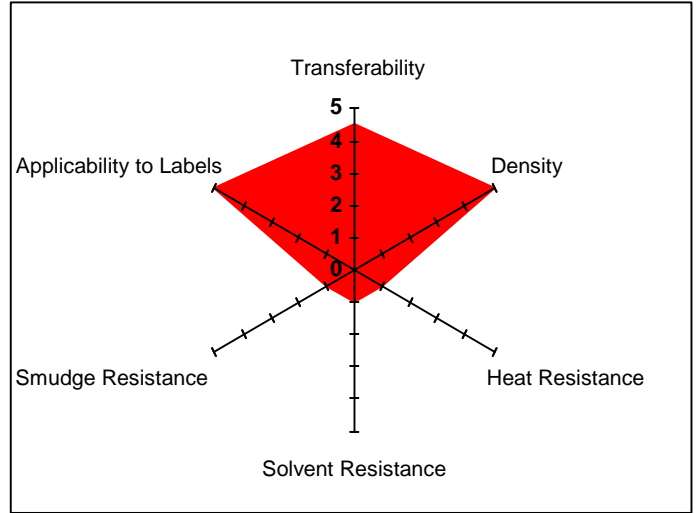

### IMAGE PROPERTIES

PANTONE COLOUR	3405C
RECOMMENDED LABEL STOCKS	COATED PAPER, GLOSS PAPER, SYNTHETIC PAPER
USAGE CONDITIONS	5°C TO 35°C / 20% TO 80% RELATIVE HUMIDITY
STORAGE CONDITIONS	0°C TO 40°C / 20% TO 80% RELATIVE HUMIDITY



# UNION CHEMICAL

NOTE : THE INFORMATION SHOWN ABOVE IS BASED UPON TESTS CARRIED OUT BY UNION CHEMICAL CO. LTD., AND IS BELIEVED TO BE RELIABLE. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE